


Light Fixture

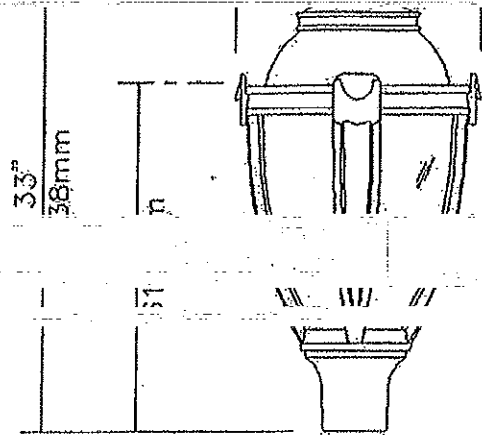

ENREGISTRÉ

REGISTERED

Description of Components:

Finial: Decorative cast 356 aluminum, mechanically assembled.

Hood: Cast 356 aluminum dome, mechanically assembled on the luminaire.

Mount: In a round shape with 4 set screws. It is cast in a one piece cast 356 aluminum mechanically assembled to the fixture.

Globe: Made of one-piece seamless inflated-molded satin clear polycarbonate. The globe is assembled on the access mechanism.

Optical System (OS): I.E.S. type III (asymmetric) cutoff optical system. Multi-faceted hydroformed aluminum reflector brightened and anodized, mechanically assembled on the luminaire.

Ballast: High power factor of 90%, Primary voltage 120/208/240/277 volts, connected to 277 volts. Lamp starting capacity 201 (500) cycles. Assembled on a universal removable tray with quick disconnect plug.

Fitter: Cast 356 aluminum c/w 4 set screws 3/8-16 UNC. Slip-fits on a 4" (102mm) outside diameter x 4" (102mm) long tenon.

BASE INFORMATION

640: Curé-Bolvin

Base & Bolts information

Anchor Plate

Free opening

B.C.: 12 1/2" 318mm
 8 1/4" 210mm

Comes with 4 steel anchor bolts, 3/4" x 1 1/2" nuts and 4 washers.

- NOTE:
 Bolts Circle Allowed:
 10 3/4" @ 10"
 11 3/4" @ 11"
 12 3/4" @ 12"

Important: Do not obstruct space



15"

1 1/2" (40mm) round extruded 6061-T6 aluminum


The glass round joint cover made from cast 356 aluminum, mechanically fastened with stainless steel screws.

1 1/2" (40mm) round extruded 6061-T6 aluminum

copper ground lug.

Base Cover: Two piece round base cover made from cast 356 aluminum, mechanically fastened with stainless steel screws.

Pole Options: (FS1), Single fuse and fuse holder, single race and race holder.




Miscellaneous

Description of Components:

1/4" TEM wire 6" (152mm) minimum exceeding from luminaire.

All seals and sealing devices



1/4" (1/4")

1 1/2" 457mm